



Application Note

Astra™ SL1620 Product Lifetime

Abstract: This document outlines the estimated product lifetime of the Astra™ SL1620.

Downloaded by Anonymous (IP: 30 Oct 2025 16:49:39 UTC)

Contents

1.	Introduction	5
2.	Device Qualification Level and Available PoH	6
2.1.	Terminology Used in This Document	6
3.	Consumer Product Lifetime Estimates	7
3.1.	Consumer SL1620 product lifetime at $T_j = 105^\circ\text{C}$ for VL	7
3.2.	Consumer SL1620 product lifetime at $T_j = 105^\circ\text{C}$ for VH	7
4.	Industrial Product Lifetime Estimates	9
4.1.	Industrial SL1620 product lifetime at $T_j = 105^\circ\text{C}$ for VL	9
4.2.	Industrial SL1620 product lifetime at $T_j = 105^\circ\text{C}$ for VH	9
5.	Summary	11
6.	References	12
7.	Revision History	13

Downloaded by Anonymous () on 30 Oct 2025 16:49:39 UTC

List of Figures

Figure 1. Astra SL1620 Consumer qualification product lifetime estimates.....	8
Figure 2. Astra SL1620 Industrial qualification product lifetime estimates	10

Downloaded by Anonymous () on 30 Oct 2025 16:49:39 UTC

List of Tables

Table 1. Consumer Max VL = 0.880V (+IRdrop 25mV), CPU 1.7GHz DDR4 2133 Mbps, GPU 800MHz, Tj=105°C	7
Table 2. Consumer Typ. VL = 0.800V (+IRdrop 25mV), CPU 1.7GHz DDR4 2133 Mbps, GPU 800MHz, Tj=105°C	7
Table 3. Consumer Max VH = 0.955V (+IRdrop 25mV), CPU 1.9GHz DDR4 2133 Mbps, GPU 800MHz, Tj=105°C	7
Table 4. Consumer Typ. VH = 0.875V (+IRdrop 25mV), CPU 1.9GHz DDR4 2133 Mbps, GPU 800MHz, Tj=105°C	7
Table 5. Industrial Max VL = 0.900V (+IRdrop 25mV), CPU 1.7GHz DDR4 2133 Mbps, GPU 800MHz, Tj=105°C	9
Table 6. Industrial Typ. VL = 0.875V (+IRdrop 25mV), CPU 1.7GHz DDR4 2133 Mbps, GPU 800MHz, Tj=105°C	9
Table 7. Industrial Max VH = 0.975V (+IRdrop 25mV), CPU 1.9GHz DDR4 2133 Mbps, GPU 800MHz, Tj=105°C	9
Table 8. Industrial Typ. VH = 0.895V (+IRdrop 25mV), CPU 1.9GHz DDR4 2133 Mbps, GPU 800MHz, Tj=105°C	9

Downloaded by Anonymous () on 30 Oct 2025 16:49:30 UTC

1. Introduction

This document outlines the estimated product lifetime of the Astra™ SL1620, based on the criteria from the qualification process. It aims to help users understand the various SL1620 qualification levels concerning the device's target operating frequencies, the maximum supported junction temperature (T_j) of the processor, and their implications for the device's lifespan.

The provided product lifetime are estimates and do not constitute a guaranteed lifespan for the product.

Downloaded by Anonymous () on 30 Oct 2025 16:49:39 UTC

2. Device Qualification Level and Available PoH

1. The product's lifetime is directly dependent on the voltage and temperature.
2. The junction temperature of the processor (T_j).
 - a. The maximum junction temperature of the device is 105°C for consumer and 125°C for Industrial.
 - b. Users must make sure their device is adequately thermally managed to prevent exceeding the maximum junction temperature.

All data provided in this document are Power-on Hours (PoH) estimates based on extensive qualification experience and testing with the Astra™ SL1620. These statistically derived estimates are not intended to define the product lifetime limit of any individual device, nor should they be interpreted as a guarantee from Synaptics regarding the actual lifespan of the device.

2.1. Terminology Used in This Document

- **VCORE:** Voltage supply for the CORE of the device.
- **VL:** Low voltage of the operating range power supply for the device.
- **VH:** High voltage of the operating range power supply for the device.

The device operates within two voltage ranges, depending on the CPU frequencies, and the leakage characteristics of the device:

- **Typical operating voltage range:** The typical range from VL to VH (see chart legend for detailed values).
- **Maximum operating voltage range:** The maximum allowable range from VL to VH (see chart legend for detailed values).

3. Consumer Product Lifetime Estimates

3.1. Consumer SL1620 product lifetime at $T_j = 105^\circ\text{C}$ for VL

VCORE LOW Max (VL) = Max VL (+IRdrop 25mV), Product Lifetime @ $T_j=105^\circ\text{C}$

Table 1. Consumer Max VL = 0.880V (+IRdrop 25mV), CPU 1.7GHz DDR4 2133 Mbps, GPU 800MHz, $T_j=105^\circ\text{C}$

CPU Speed	Soc Operating Voltage	Junction Temperature T_j	Power-on Hours (PoH)	Product Lifetime
(GHz)	(V)	($^\circ\text{C}$)	Hours	Years
1.7	0.905	105	374,112	42.7

VCORE LOW Typ. (VL) = Typ. VL (+IRdrop 25mV), Product Lifetime @ $T_j=105^\circ\text{C}$

Table 2. Consumer Typ. VL = 0.800V (+IRdrop 25mV), CPU 1.7GHz DDR4 2133 Mbps, GPU 800MHz, $T_j=105^\circ\text{C}$

CPU Speed	Soc Operating Voltage	Junction Temperature T_j	Power-on Hours (PoH)	Product Lifetime
(GHz)	(V)	($^\circ\text{C}$)	Hours	Years
1.7	0.825	105	1,457,616	166

3.2. Consumer SL1620 product lifetime at $T_j = 105^\circ\text{C}$ for VH

VCORE HIGH Max (VH) = Max VH (+IRdrop 25mV), Product Lifetime @ $T_j=105^\circ\text{C}$

Table 3. Consumer Max VH = 0.955V (+IRdrop 25mV), CPU 1.9GHz DDR4 2133 Mbps, GPU 800MHz, $T_j=105^\circ\text{C}$


CPU Speed	Soc Operating Voltage	Junction Temperature T_j	Power-on Hours (PoH)	Product Lifetime
(GHz)	(V)	($^\circ\text{C}$)	Hours	Years
1.9	0.980	105	104,538	11.9

VCORE HIGH Typ. VH = Typ. VH (+IRdrop 25mV), Product Lifetime @ $T_j=105^\circ\text{C}$

Table 4. Consumer Typ. VH = 0.875V (+IRdrop 25mV), CPU 1.9GHz DDR4 2133 Mbps, GPU 800MHz, $T_j=105^\circ\text{C}$

CPU Speed	Soc Operating Voltage	Junction Temperature T_j	Power-on Hours (PoH)	Product Lifetime
(GHz)	(V)	($^\circ\text{C}$)	Hours	Years
1.9	0.900	105	407,303	46

PoH can be directly retrieved from the [Figure 1](#) to determine the necessary trade-offs between CPU frequency, and junction temperature in order to extend the estimated PoH of the device.

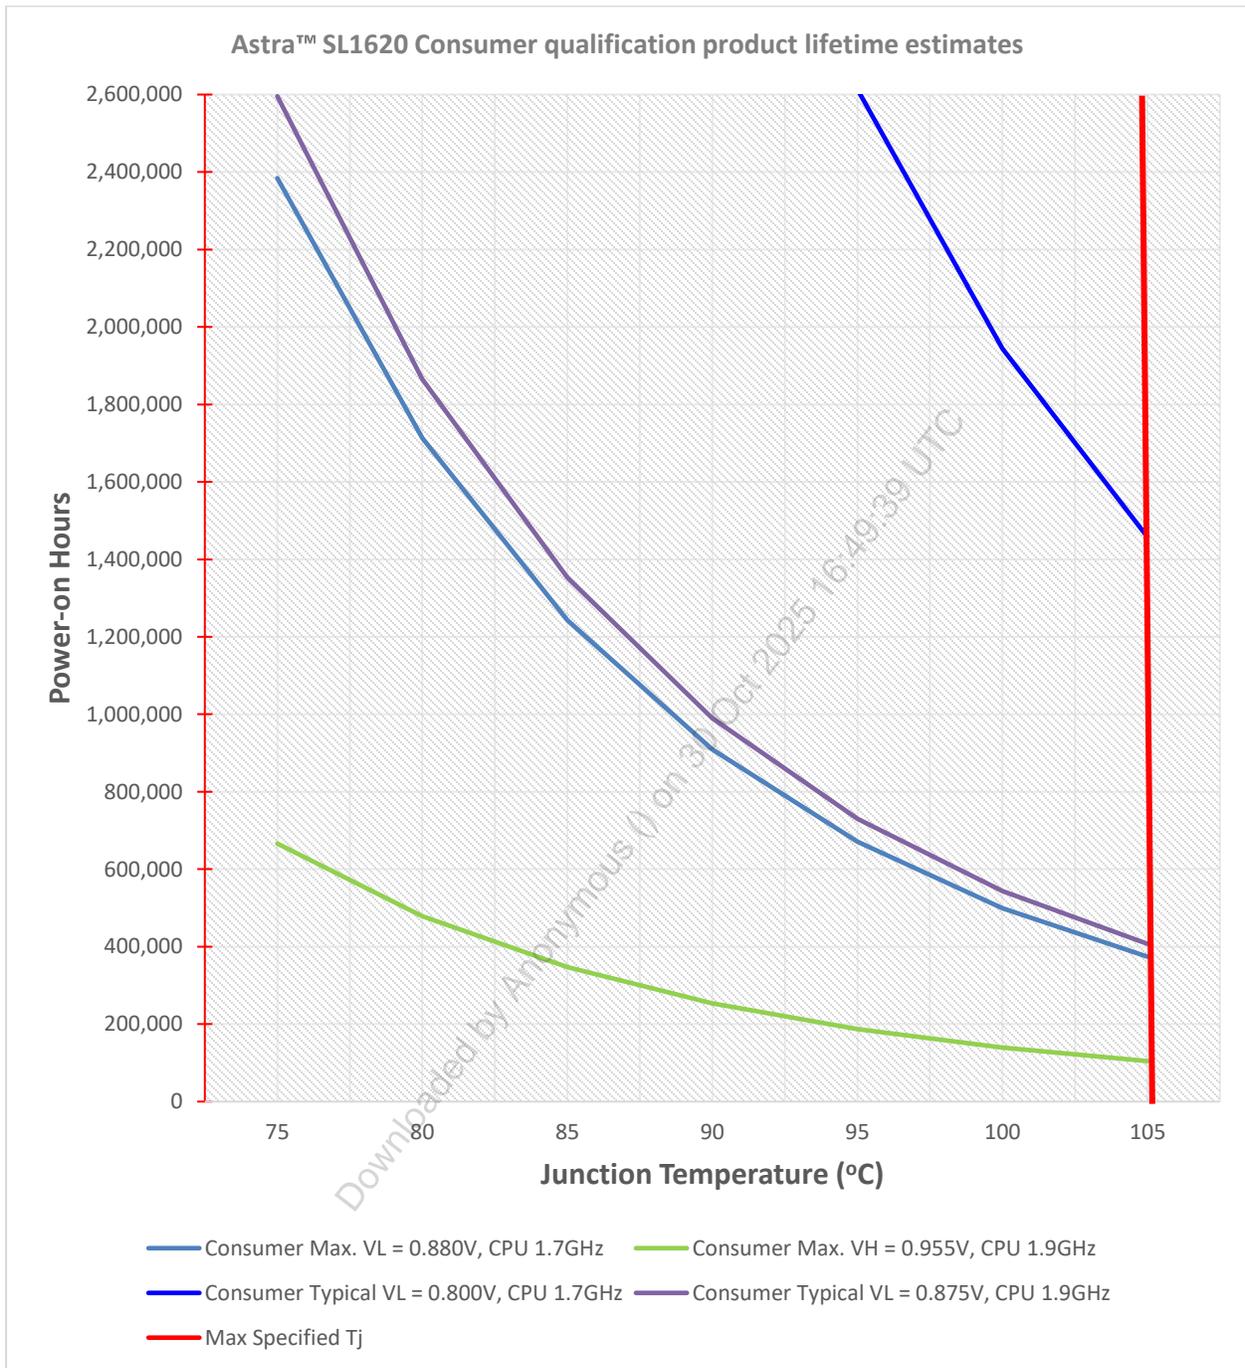

Note: The plot includes IRdrop 25mV.

Figure 1. Astra SL1620 Consumer qualification product lifetime estimates

4. Industrial Product Lifetime Estimates

4.1. Industrial SL1620 product lifetime at $T_j = 105^\circ\text{C}$ for VL

VCORE LOW Max (VL) = Max VL (+IRdrop 25mV), Product Lifetime PL @ $T_j=105^\circ\text{C}$

Table 5. Industrial Max VL = 0.900V (+IRdrop 25mV), CPU 1.7GHz DDR4 2133 Mbps, GPU 800Mhz, $T_j=105^\circ\text{C}$

CPU Speed	Soc Operating Voltage	Junction Temperature T_j	Power-on Hours (PoH)	Product Lifetime
(GHz)	(V)	($^\circ\text{C}$)	Hours	Years
1.7	0.925	125	532,565	60.7

VCORE LOW Typ. (VL) = Typ. VL (+IRdrop 25mV), Product Lifetime PL @ $T_j=105^\circ\text{C}$

Table 6. Industrial Typ. VL = 0.875V (+IRdrop 25mV), CPU 1.7GHz DDR4 2133 Mbps, GPU 800Mhz, $T_j=105^\circ\text{C}$

CPU Speed	Soc Operating Voltage	Junction Temperature T_j	Power-on Hours (PoH)	Product Lifetime
(GHz)	(V)	($^\circ\text{C}$)	Hours	Years
1.7	0.900	125	814,606	92.9

4.2. Industrial SL1620 product lifetime at $T_j = 105^\circ\text{C}$ for VH

VCORE HIGH Max (VH) = Max VH (+IRdrop 25mV), Product Lifetime @ $T_j=105^\circ\text{C}$

Table 7. Industrial Max VH = 0.975V (+IRdrop 25mV), CPU 1.9GHz DDR4 2133 Mbps, GPU 800Mhz, $T_j=105^\circ\text{C}$


CPU Speed	Soc Operating Voltage	Junction Temperature T_j	Power-on Hours (PoH)	Product Lifetime
(GHz)	(V)	($^\circ\text{C}$)	Hours	Years
1.9	1	125	148,815	16.9

VCORE HIGH Typ. (VH) = Typ. VH (+IRdrop 25mV), Product Lifetime @ $T_j=105^\circ\text{C}$

Table 8. Industrial Typ. VH = 0.895V (+IRdrop 25mV), CPU 1.9GHz DDR4 2133 Mbps, GPU 800Mhz, $T_j=105^\circ\text{C}$

CPU Speed	Soc Operating Voltage	Junction Temperature T_j	Power-on Hours (PoH)	Product Lifetime
(GHz)	(V)	($^\circ\text{C}$)	Hours	Years
1.9	0.920	125	579,812	66

PoH can be directly retrieved from the [Figure 2](#) to determine the necessary trade-offs between CPU frequency, and junction temperature in order to extend the estimated PoH of the device.

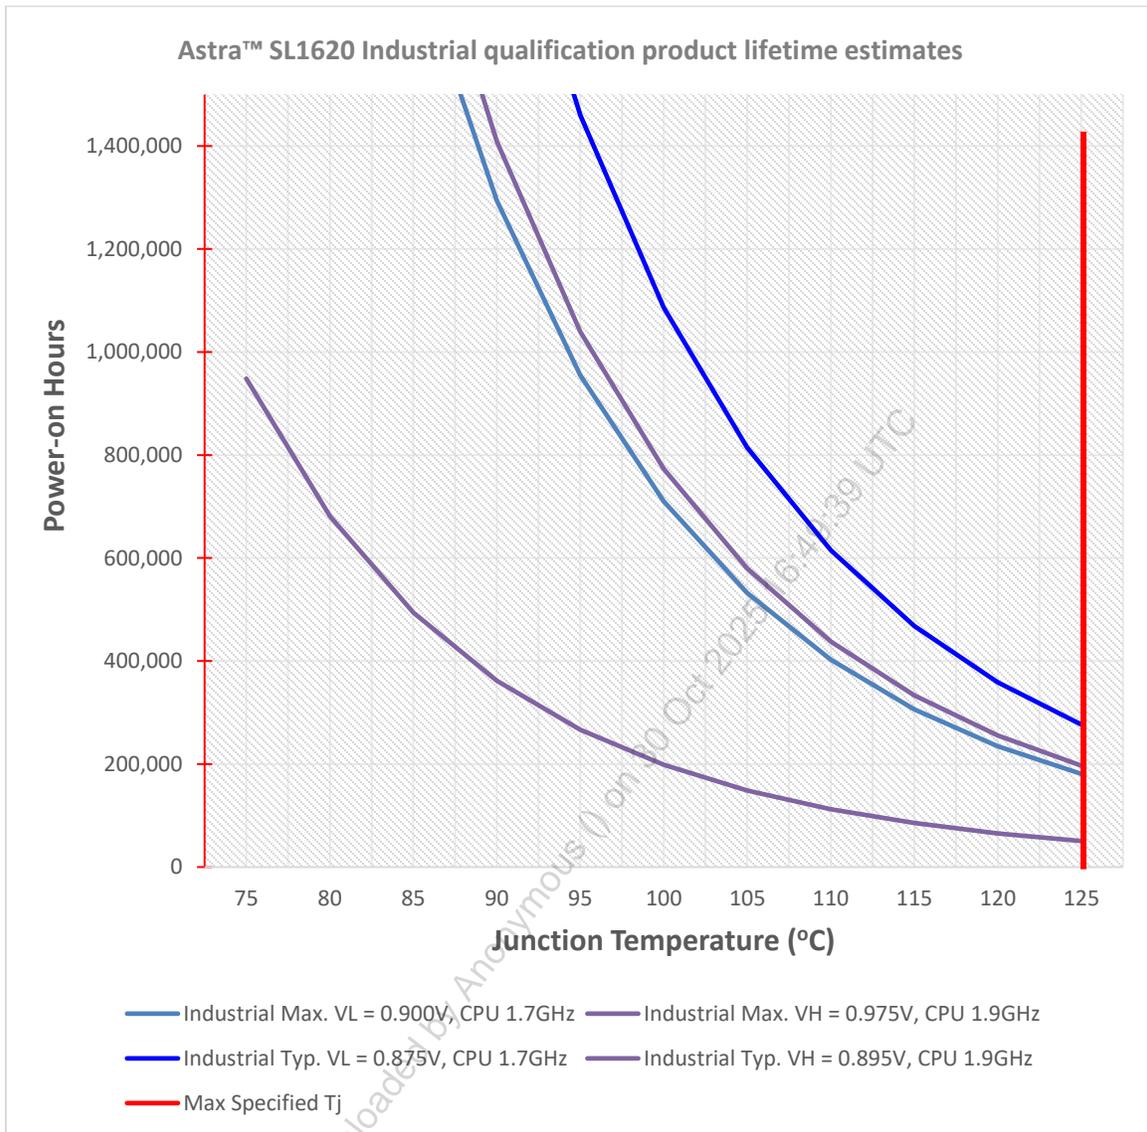

Note: The plot includes IRdrop 25mV

Figure 2. Astra SL1620 Industrial qualification product lifetime estimates

5. Summary

Balancing the target operating voltage and frequency of the device with the processor's junction temperature (T_j) can significantly extend the device's lifespan.

Reducing the operating junction temperature is the most effective way to increase the device's product lifetime without impacting performance. This can be achieved by enhancing the application's thermal dissipation capacity.

Additionally, the junction temperature can be monitored, and performance can be adjusted to prevent it from exceeding the maximum allowable level.

Downloaded by Anonymous () on 30 Oct 2025 16:49:39 UTC

6. References

- *SL1620 Embedded IoT Processor Electrical Specification Datasheet* (PN: 505-001428-01)

Downloaded by Anonymous () on 30 Oct 2025 16:49:39 UTC

7. Revision History

Revision	Description
A	Initial release
B	Updated section 4 (Industrial Product Lifetime Estimates) and added note to Figure 1 and Figure 2.

Downloaded by Anonymous () on 30 Oct 2025 16:49:39 UTC



Copyright

Copyright © 2024-2025 Synaptics Incorporated. All Rights Reserved.

Trademarks

Astra, Synaptics; the Synaptics logo; add other trademarks here, are trademarks or registered trademarks of Synaptics Incorporated in the United States and/or other countries.

All other trademarks are the properties of their respective owners.

Contact Us

Visit our website at www.synaptics.com to locate the Synaptics office nearest you.

PN: 506-001575-01 Rev B

Notice

Use of the materials may require a license of intellectual property from a third party or from Synaptics. This document conveys no express or implied licenses to any intellectual property rights belonging to Synaptics or any other party. Synaptics may, from time to time and at its sole option, update the information contained in this document without notice.

INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED "AS-IS," AND SYNAPTICS HEREBY DISCLAIMS ALL EXPRESS OR IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, AND ANY WARRANTIES OF NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT SHALL SYNAPTICS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION CONTAINED IN THIS DOCUMENT, HOWEVER CAUSED AND BASED ON ANY THEORY OF LIABILITY, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, AND EVEN IF SYNAPTICS WAS ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. IF A TRIBUNAL OF COMPETENT JURISDICTION DOES NOT PERMIT THE DISCLAIMER OF DIRECT DAMAGES OR ANY OTHER DAMAGES, SYNAPTICS' TOTAL CUMULATIVE LIABILITY TO ANY PARTY SHALL NOT EXCEED ONE HUNDRED U.S. DOLLARS.